




DIN 985 - ISO 10511

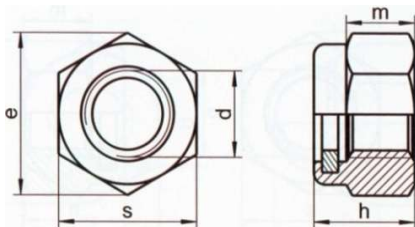

	M3	M4	M5	M6	M8	M10	M12	M14	M16	M18	M20	M22	M24	M27
m	2,40	2,90	3,20	4,00	5,50	6,50	8,00	9,50	10,50	13,00	14,00	15,00	15,00	17,00
h	4,00	5,00	5,00	6,00	8,00	10,00	12,00	14,00	16,00	18,50	20,00	22,00	24,00	27,00
s	5,50	7,00	8,00	10,00	13,00	17,00	19,00	22,00	24,00	27,00	30,00	32,00	36,00	41,00

	M30	M33	M36	M39	M42	M45	M48
m	19,00	22,00	25,00	27,00	29	32,00	36,00
h	30,00	33,00	36,00	39,00	42	45,00	48,00
s	46,00	50,00	55,00	60,00	65	70,00	75,00