




DIN 603- ISO 8677

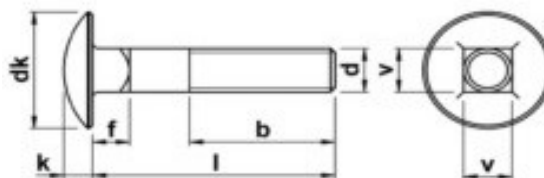

	M3	M4	M5	M6	M8	M10	M12	M14	M16	M18	M20	M22	M24	M27	M30
dk min.			12,45	15,45	19,35	23,35	29,35		37,20						
f min.			2,90	3,40	4,40	5,40	7,25		11,10						
k min.			2,70	3,12	4,12	4,62	6,05		8,05						
v min.			4,52	5,52	7,42	9,42	11,30		15,30						
b<125			16,00	18,00	22,00	26,00	30,00		38,00						
b>125			22,00	24,00	28,00	32,00	36,00		44,00						